



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

JC715 U.S. PTO
09/998034



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr.

Patent application No.

Demande de brevet n°

00204264.6

Der Präsident des Europäischen Patentamts:
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

11/05/01





Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr
Application no
Demande n°

00204264.6

Anmeldetag
Date of filing
Date de dépôt

30/11/00

Anmelder
Applicant(s)
Demandeur(s)

Koninklijke Philips Electronics N.V.
5621 BA Eindhoven
NETHERLANDS

Bezeichnung der Erfindung
Title of the invention
Titre de l'invention

Multi-phase LC oscillator

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat
State
Pays

Tag
Date
Date

Aktenzeichen
File no
Numéro de dépôt


Internationale Patentklassifikation
International Patent classification
Classification internationale des brevets

/

Am Anmeldetag benannte Vertragsstaaten

Contracting states designated at date of filing AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt

Bemerkungen
Remarks
Remarques

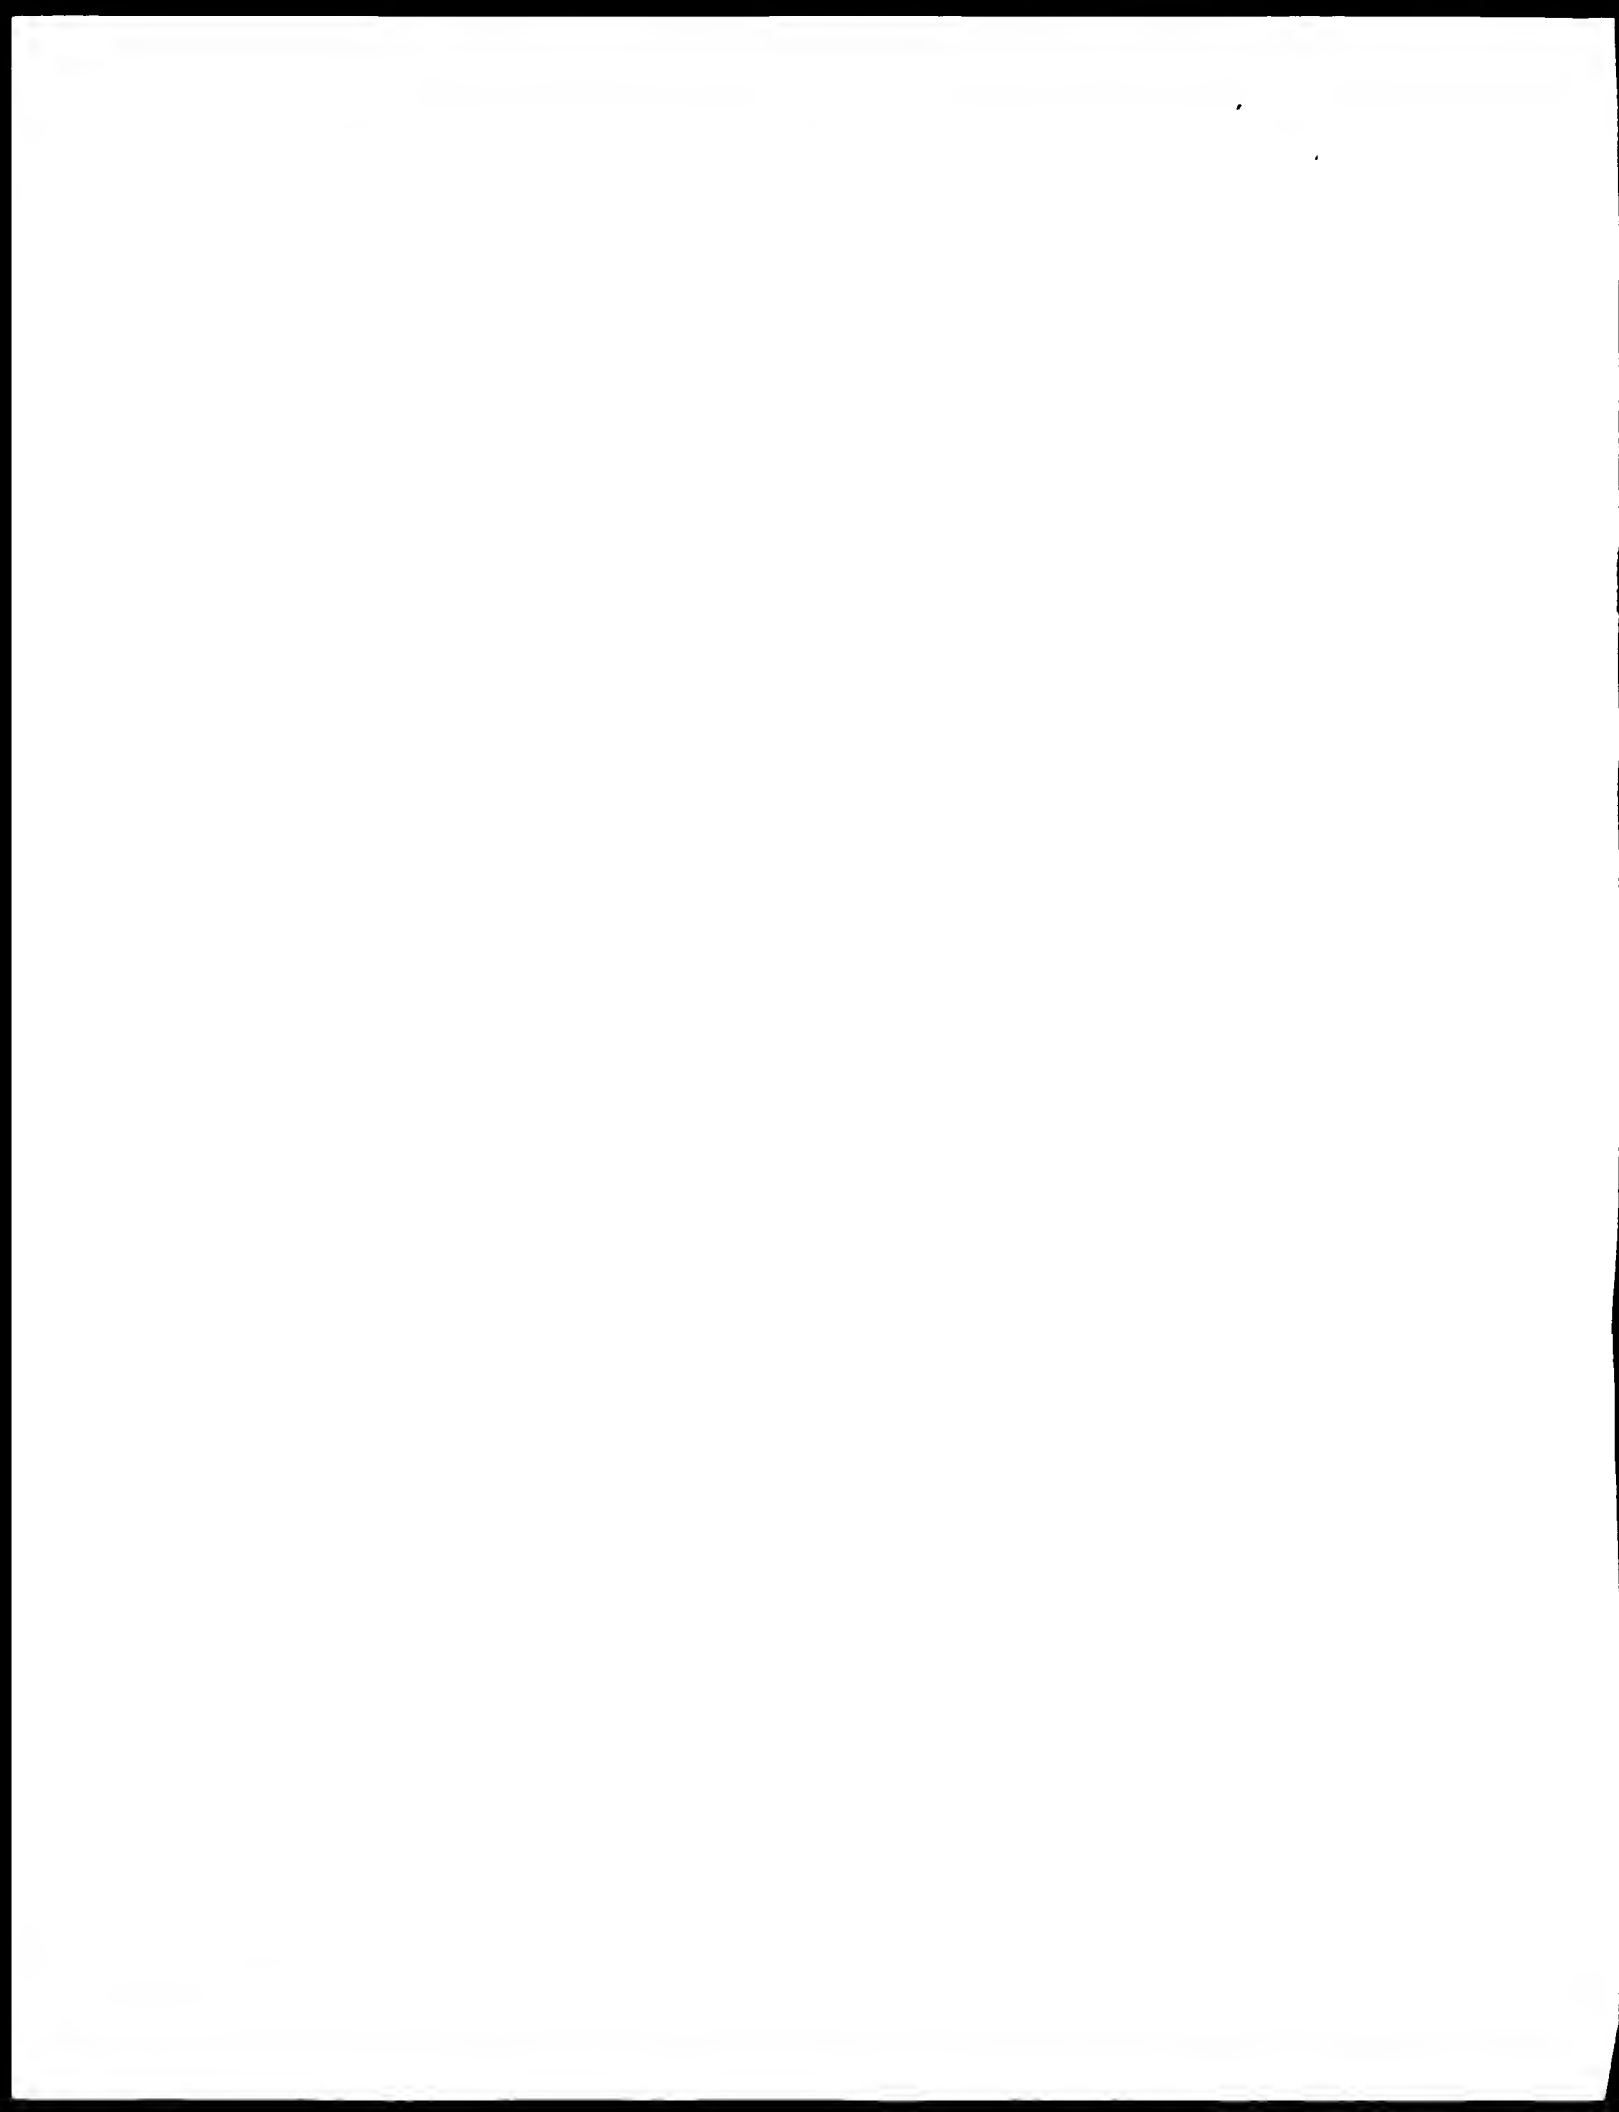

Multi-phase LC oscillator

The invention relates to a multi-phase LC oscillator.

In many modern integrated transceivers architectures, in-phase (I) and quadrature (Q) signals are needed in the signal processing part.

5 An example is the zero-IF architecture in which the incoming RF input signal is converted directly to a baseband signal. When the carrier-to-noise ratio (CNR) requirements, given a certain power budget, of an I/Q oscillator are stringent, use of I/Q LC oscillators can be required. Phase noise of LC oscillators is better than RC oscillators given a limited power budget, since energy can be stored in the resonator of the LC oscillator and
10 only the losses in the resonator and active device have to be compensated periodically.

 From the international patent application WO96/33552 a LC oscillator is known which is coupled to one or more additional LC oscillators in order to increase the stability of an oscillator. The oscillator is a single-phase oscillator, which does not operate at
15 optimum point if the amplifier has a parasitic phase shift.

 An object of the invention is to extend the class of correct by construction I/Q LC oscillator that in addition provides optimum CNR performance correct by construction.

 To this end a multi-phase LC oscillator according to the invention comprises
20 the features of claim 1.

 Quadrature signals are obtained when this multi-phase oscillator has an even number of stages.

 It is to be noticed here that further several integrated I/Q LC oscillator architectures are known in the art. These oscillators do belong to the so-called class of
25 correct-by construction oscillators, since they are based on two identical/symmetrical sections. However, these state of the art architectures do not oscillate at zero phase shift of the resonator, which leads to sub-optimal CNR performance of these I/Q oscillators.

 Embodiments of the invention are described in the dependent claims.

These and other aspects of the invention will be apparent from and elucidated with reference to examples described here and after. Herein shows:

Figure 1 block-schematically an example of a multiphase LC oscillator according to the invention,

5 Figure 2 block-schematically an example of V/I converter according to the invention,

Figure 3 block-schematically a second example of a V/I converter with compensation according to the invention,

Figure 4 a phase plot of the example of figure 3, and

10 Figure 5 a block-schematically an third example of a V/I converter according to the invention.

Figure 1 shows block-schematically an example of a multiphase LC oscillator 1 according to the invention. At a first input V_{in1} the multiphase LC oscillator receives an
15 input signal. This input is coupled to a first voltage-to-current converter VICONV1. At an output the voltage-to-current converter supplies an output current I_{out1} to a first LC oscillator OSC1. In this example the LC oscillator comprises an inductance L, a capacitor C, a resistance R_p and a parasitic resistance $-R_a$.

The output of the LC oscillator is coupled to an input V_{in2} of a second voltage-to-current converter VICONV2. This input V_{in2} is at the same time a first output V_{out1} of the
20 multiphase LC oscillator 1.

The input V_{in2} supplies the output signal of the oscillator OSC1 to the converter VICONV2.

The converter supplies as output signal the current I_{out2} to a second oscillator
25 OSC2. This second oscillator comprises in this example the same elements as the oscillator OSC1.

The output of the oscillator OSC2 is coupled to the second output V_{outQ} of the multiphase LC oscillator 1.

The output V_{outQ} is also coupled as feedback signal to the first input V_{in1} of the
30 multiphase LC oscillator via an inverter.

The two LC oscillators OSC1 and OSC2 are coupled with the V/I converters, which implement the necessary 90-degree phase shift. This phase shift can be positive or negative. This exact 90-degree phase-shift ensures that the oscillator(s) operates at a

maximum slope of the resonator phase-characteristic. Also only one oscillation point is available which is important for robustness.

Tuning can be realized in several ways. The LC oscillator OSC1 and OSC2 can be tunable, for example by means of varactors.

5 Alternatively, tuning can be implemented by varying the phase shift of the V/I converters VICONV1 and VICONV2. In that case the phase shift of each V/I converter is 90 degrees +/- the phase shift of the resonator which corresponds to the wanted frequency. Tuning is, in this way performed, around the optimum operating point of the resonator.

10 In a practical implementation, oscillator OSC1 and oscillator OSC2 will have some parasitic phase shift. In that case the V/I converters must provide (in this special case of a 2-stagew multi-phase oscillator: I/Q oscillator) 90 degrees shift minus the parasitic phase shift for optimum operation.

The exact 90 degrees phase-shift can be introduced in several ways:
implementing an integrator within the V/I converter
15 implementing a differentiator within the V/I converter

In general: a network that provides 90 degrees phase-shift. This network or circuit may be adjustable to ensure 90 degrees phase-shift over the complete tuning range of the oscillator.

Figure 2 shows block-schematically an example of V/I converter VICONV20 according to the invention. In this example an integrator INT20 implements the 90 degrees
20 phase-shift. The amplifiers AM21 and AM22 are in this example supposed to be ideal, so having no phase shift.

Figure 3 block-schematically a second example of a V/I converter VICONV30 with compensation according to the invention. In this example the amplifiers AM33 and AM32 can have some (parasitic) phase shift which has to be compensated by a third
25 amplifier AM31 which is in this example coupled parallel to the other two amplifiers. The phase shift of each amplifier is respectively ϕ_1 , ϕ_2 , and ϕ_3 . In figure 4 the phase plot of the different phase shift is shown. The integrator INT30 implements a 90 degrees phase-shift. If (due to the implementation) the amplifiers AM33 and AM32 have some (parasitic) phase shift, the amplifier AM31 is set to compensate for this and make the total phase shift 90
30 degrees. At the same time the amplifier AM31 can be used for tuning around the maximum phase slope point.

Figure 4 shows a phase plot of the example of the V/I converter VICONV30 of figure 3. This phase plot shows how an exact 90 degrees can be achieved taking into account

the phase-shift of the transconductances (ϕ_1 , ϕ_2 , and ϕ_3) due to implementation, parasitic effects etc.

Figure 5 shows block-schematically an third example of a V/I converter VICON50 according to the invention. In this example the conversion of 90 degrees is implemented as a differentiation by a differentiator DIF50 to obtain the 90 degrees phase shift and two amplifiers AM51 and AM52 whereby the amplifier AM51 accomplishes a current to voltage conversion and the amplifier AM52 accomplishes a voltage to current conversion. This combined with the differentiation of the differentiator DIF50 accomplishes an overall voltage to current conversion. The amplifier AM51 has in this example its input coupled with virtual ground.

It will be noticed by the man skilled in the art that also in this example as in the example shown in figure 3 also if necessary here a kind of compensation can be achieved.

Further it will be clear that the invention is not limited to the aforementioned examples and that instead of the shown multiphase LC oscillator as a second stage oscillator it is also possible to obtain higher order multiphase LC oscillators with the same invention. In case the multi phase LC oscillator has an even number of stages quadrature signals can be obtained.

CLAIMS:

1. Multiphase LC oscillator comprising N units whereby N is at least 2, and each unit performs a phase shift of $180^\circ/N$ of an incoming signal, whereby each unit comprises a VI converter part with a phase shift $180^\circ/N$ and an LC oscillation part, and the multiphase LC oscillator supplies at least two outputs signal with a phase difference.

5

2. Multiphase LC oscillator as claimed in claim 1, characterized in that each unit comprises control means to adjust the phase shift to obtain the required phase shift of $180^\circ/N$.

Multiphase LC oscillator as claimed in claim 2, characterized in that a VI converter of the unit comprises amplifiers in series with a compensation amplifier parallel.

10

3. V/I converter for use in a multiphase LC oscillator according to claim 1, characterized in that V/I converter comprises compensation means to compensate for a phase shift.

15


4. Method to obtain multiphase signals with phase differences 180 degrees/N whereby N is at least 2, having the steps of receiving an incoming signal, performing a phase shift of 180 degrees/N and supplying signals with a phase difference.

ABSTRACT:

A multiphase LC oscillator is proposed which belongs to the so-called class, which delivers correct-by-construction I/Q signals.

Unlike state of the art I/Q LC oscillators, the proposed invention oscillates at the point where the quality factor of the resonator is maximum.

5 Hence the new multiphase LC oscillator provides also maximum carrier to noise ratio correct by construction given a certain resonator. This is realized by implementing the V/I converters which couple the N LC oscillators, with an exact $180/N$ -degree phase shift.

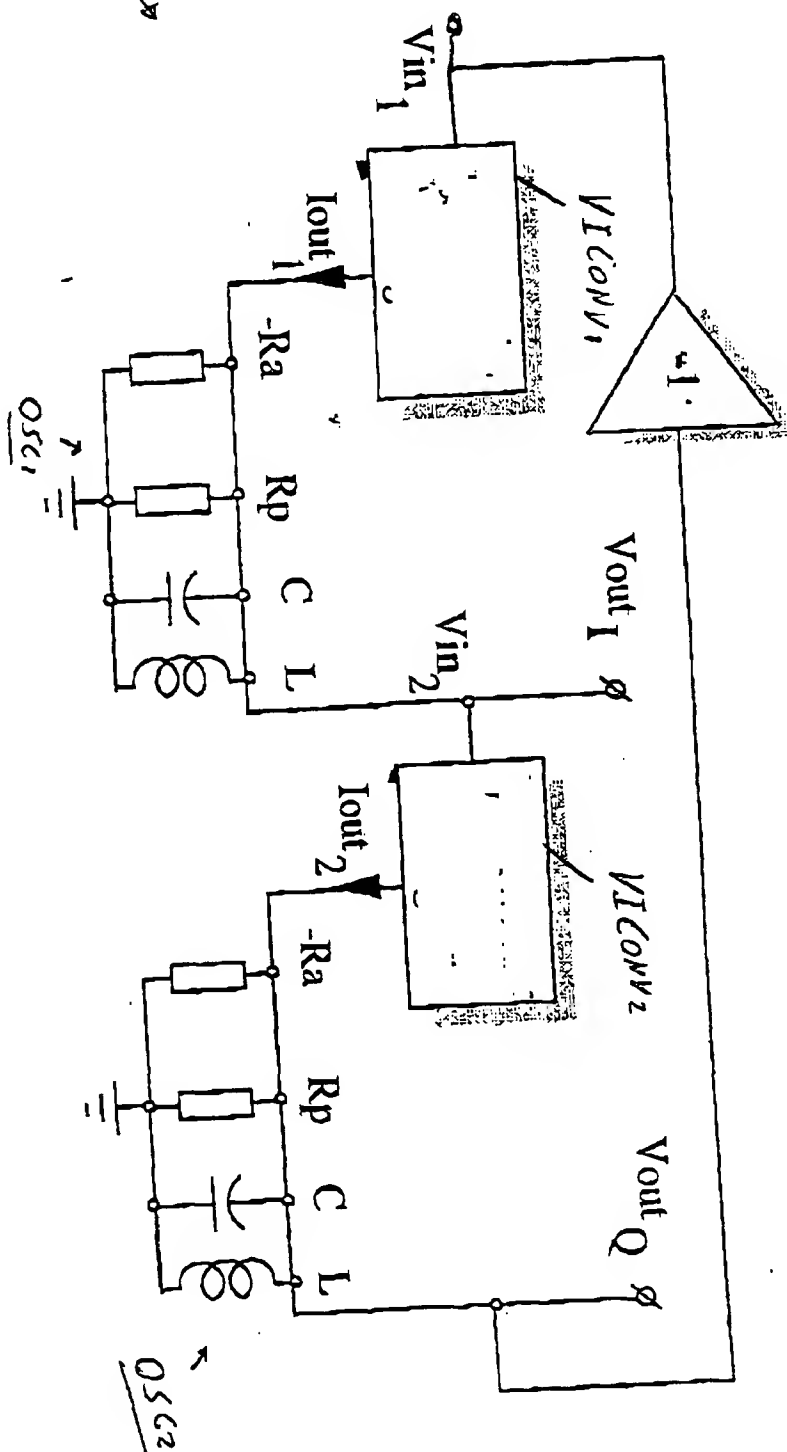

F1 q1.

1/3

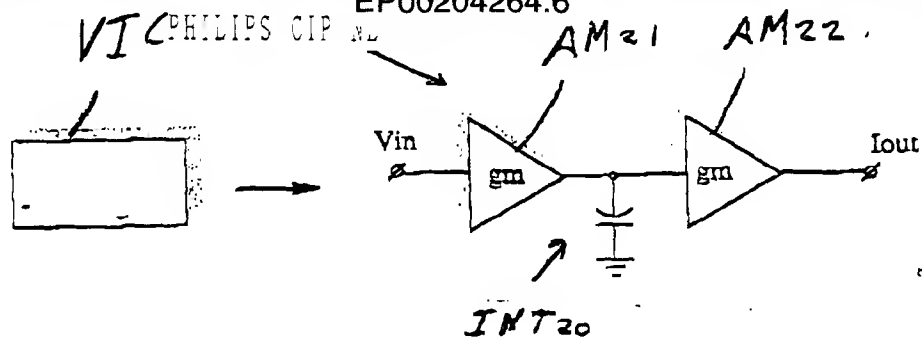


Fig 2

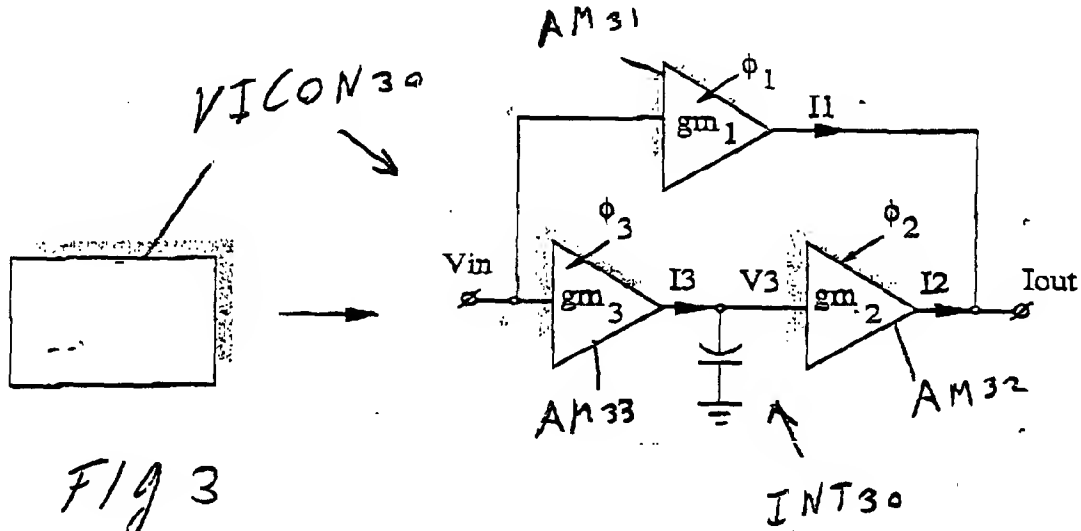


Fig 3

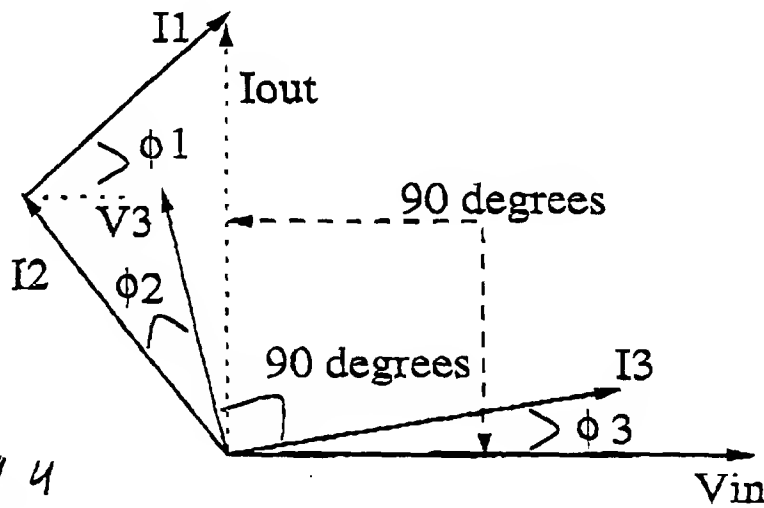


Fig 4

3/3

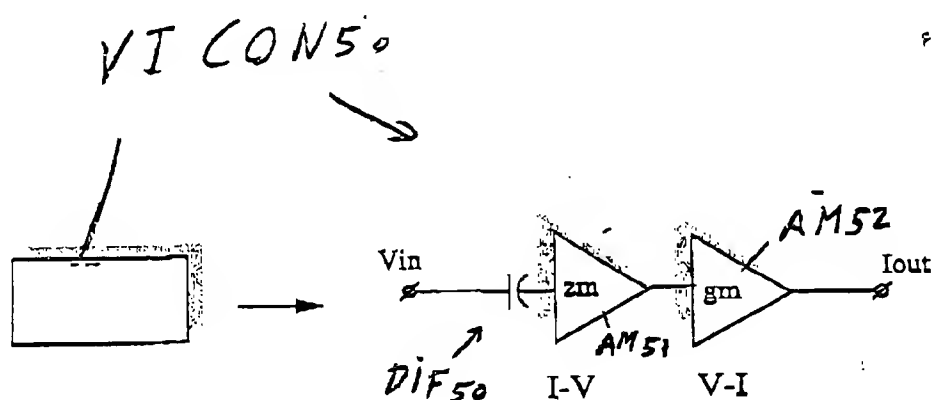


FIG 5

